Mill 4-11™

One tool for all applications.


The Mill 4™ series is specially engineered to achieve excellent surface quality and higher metal removal rates in shoulder milling applications. Its unique design allows you to apply the tool in multiple passes (stepping down) with outstanding results.

From roughing to finishing operations, the Mill 4 series is applicable in a wide range of workpiece materials: steel, cast iron, stainless steel, non-ferrous materials, and high-temp alloys.

Features and Benefits


- Double-sided strong insert with 4 cutting edges.
- High positive geometry for lower cutting forces.
- Superior wall and surface finish capabilities.
- “Stepless” solution for multiple-pass operations.
- Comprehensive offering to cover all applications in all material groups.

-ELEJ



For non-ferrous materials.

-EGE




1st choice for stainless steel. Lower cutting forces.

-SGE



First choice for the Mill 4 platform, especially when machining steels.

-SGEM



1st choice for cast iron. Strongest cutting edge.


Uneven pocket spacing.

Screw-on, end mills, and shell mill cutter with internal coolant.



Integrated wiper facet for best-in-class floor finisher.

Up to 11mm Ap capabilities.





Multiple corner nose radii available from 0,4mm up to 1,6mm.

Double-sided insert with 4 cutting edges.

TP9 insert screw (M3) to provide higher reliability and safe processes.

- One tool for all applications: from roughing to finishing.
- Superior wall and surface finishing capabilities. Best choice for stepping down operations.
- Up to 11mm depth of cut.
- Screw-on cutters provide better rigidity and stability when used with small spindles: BT30, BT40, DV40, HSK50, HSK63, etc.
- Screw-on cutters can be less expensive when compared to cylindrical shank cutters due to their higher flexibility through multiple holder combinations.



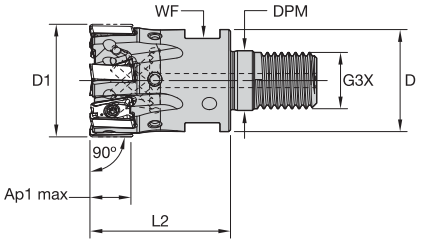



Screw-On End Mills

order number	catalogue number	D1	D	DPM	G3X	L2	WF	Ap1 max	Z	kg	max RPM
6136738	**M4D016Z02M08LN11**	16	13	8,5	M8	25	10	11,0	2	0,03	48000
6131682	**M4D020Z03M10LN11**	20	18	10,5	M10	28	15	11,0	3	0,06	40200
6131686	**M4D025Z04M12LN11**	25	21	12,5	M12	40	17	11,0	4	0,10	34300
6136793	**M4D032Z05M16LN11**	32	29	17,0	M16	40	24	11,0	5	0,20	29200
6134187	**M4D032Z06M16LN11**	32	29	17,0	M16	40	24	11,0	6	0,19	29200

Spare Parts









D1	insert screw	Nm	Torx Plus driver
16	**MS2263**	1,5	**DT9IP**
20	**MS2263**	1,5	**DT9IP**
25	**MS2263**	1,5	**DT9IP**
32	**MS2263**	1,5	**DT9IP**

- One tool for all applications: from roughing to finishing.
- Superior wall and surface finishing capabilities.
- Best choice for stepping down operations.
- Up to 11mm depth of cut.



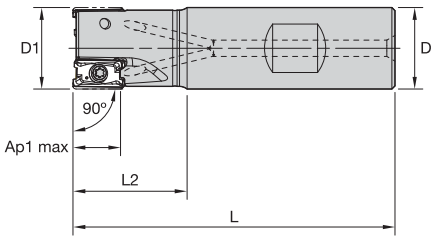



Weldon End Mills

order number	catalogue number	D1	D	L	L2	Ap1 max	Z	kg	max RPM
6131628	**M4D016Z02B16LN11**	16	16	74	25	11,0	2	0,09	48000
6131630	**M4D020Z02B20LN11**	20	20	79	28	11,0	2	0,17	40200
6136740	**M4D020Z03B20LN11**	20	20	79	28	11,0	3	0,16	42000
6131684	**M4D025Z03B25LN11**	25	25	89	32	11,0	3	0,29	34300
6134185	**M4D032Z04B32LN11**	32	32	110	49	11,0	4	0,60	29200
6136795	**M4D040Z05B32LN11**	40	32	110	49	11,0	5	0,66	25400

Spare Parts









D1	insert screw	Nm	Torx Plus driver
16	**MS2263**	1,5	**DT9IP**
20	**MS2263**	1,5	**DT9IP**
25	**MS2263**	1,5	**DT9IP**
32	**MS2263**	1,5	**DT9IP**
40	**MS2263**	1,5	**DT9IP**

- One tool for all applications: from roughing to finishing.
- Superior wall and surface finishing capabilities.
- Best choice for stepping down operations.
- Up to 11mm depth of cut.



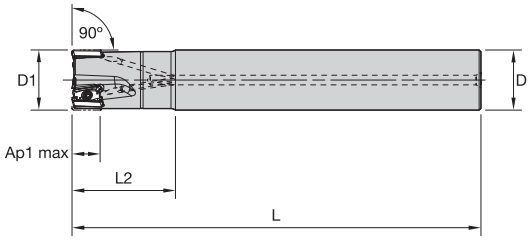



Cylindrical End Mills

order number	catalogue number	D1	D	L	L2	Ap1 max	Z	kg	max RPM
6131627	M4D016Z02A16LN11L090	16	16	90	25	11,0	2	0,12	48000
6136737	M4D016Z02A16LN11L150	16	16	150	25	11,0	2	0,21	48000
6131629	M4D020Z02A20LN11L150	20	20	150	28	11,0	2	0,33	40200
6131681	M4D020Z03A20LN11L090	20	20	90	28	11,0	3	0,21	40200
6136739	M4D020Z03A20LN11L150	20	20	150	28	11,0	3	0,33	40200
6131683	M4D025Z03A25LN11L170	25	25	170	43	11,0	3	0,63	34300
6131685	M4D025Z04A25LN11L100	25	25	100	43	11,0	4	0,33	34300
6136791	M4D025Z04A25LN11L170	25	25	170	43	11,0	4	0,59	34300
6134184	M4D032Z04A32LN11L200	32	32	200	49	11,0	4	1,16	29200
6134186	M4D032Z05A32LN11L110	32	32	110	49	11,0	5	0,61	29200
6136792	M4D032Z05A32LN11L200	32	32	200	49	11,0	5	1,17	29200
6136794	M4D040Z05A32LN11L200	40	32	200	49	11,0	5	1,22	25400

Spare Parts










D1	insert screw	Nm	Torx Plus driver
16	MS2263	1,5	DT9IP
20	MS2263	1,5	DT9IP
25	MS2263	1,5	DT9IP
32	MS2263	1,5	DT9IP
40	MS2263	1,5	DT9IP

- One tool for all applications: from roughing to finishing.
- Superior wall and surface finishing capabilities.
- Best choice for stepping down operations.
- Up to 11mm depth of cut.



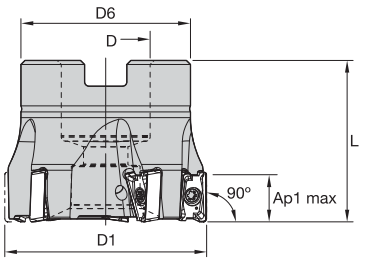



Shell Mills

order number	catalogue number	D1	D	D6	L	Ap1 max	Z	kg	max RPM
6134188	**M4D040Z04S16LN11**	40	16	37	40	11,0	4	0,23	25400
6134189	**M4D040Z06S16LN11**	40	16	37	40	11,0	6	0,22	25400
6136796	**M4D040Z07S16LN11**	40	16	37	40	11,0	7	0,23	25400
6134190	**M4D050Z05S22LN11**	50	22	42	40	11,0	5	0,31	22300
6134231	**M4D050Z07S22LN11**	50	22	42	40	11,0	7	0,32	22300
6136797	**M4D050Z09S22LN11**	50	22	42	40	11,0	9	0,32	22300
6134232	**M4D063Z06S22LN11**	63	22	50	40	11,0	6	0,56	19500
6134233	**M4D063Z09S22LN11**	63	22	50	40	11,0	9	0,56	19500
6134234	**M4D080Z08S27LN11**	80	27	60	50	11,0	8	1,12	17100
6136798	**M4D080Z10S27LN11**	80	27	60	50	11,0	10	1,11	17100

Spare Parts







D1	insert screw	Nm	Torx Plus driver	socket-head cap screw
40	**MS2263**	1,5	**DT9IP**	**125.825**
50	**MS2263**	1,5	**DT9IP**	**125.025**
63	**MS2263**	1,5	**DT9IP**	**125.025**
80	**MS2263**	1,5	**DT9IP**	**125.230**

Insert Selection Guide

Material Group	Light Machining (Light geometry)		General Purpose		Heavy Machining (Strong geometry)	
	wear resistance		←	→	toughness	
	Geometry	Grade	Geometry	Grade	Geometry	Grade
P1–P2	.E..GE	KCPM40	**.S..GE**	**KCPM40**	.S..GEM	KCPM40
P3–P4	.E..GE	KCPM40	**.S..GE**	**KCPM40**	.S..GEM	KCPM40
P5–P6	.E..GE	KC725M	**.S..GE**	**KC725M**	.S..GEM	KCPM40
M1–M2	.E..GE	KCSM40	**.S..GE**	**KCSM40**	.S..GEM	KC522M
M3	.E..GE	KCPM40	**.S..GE**	**KCPM40**	.S..GEM	KCPM40
K1–K2	.S..GE	KC520M	**.S..GE**	**KCK15**	.S..GEM	KCK15
K3	.S..GE	KC520M	**.S..GE**	**KCK15**	.S..GEM	KC520M
N1–N2	.E..LEJ	KC422M	**.E..LEJ**	**KC422M**	.E..LEJ	KC422M
N3	.E..LEJ	KC422M	**.E..LEJ**	**KC422M**	.E..LEJ	KC422M
S1–S2	.E..GE	KCSM40	**.S..GE**	**KC725M**	.S..GE	KCSM40
S3	.E..GE	KCSM40	**.S..GE**	**KCSM40**	.S..GE	KCSM40
S4	.E..GE	KCSM40	**.S..GE**	**KCSM40**	.S..GE	KCSM40
H1	–	–	**–**	**–**	–	–

Indexable Inserts • Mill 4-11


LNGU11-ELEJ



LNGU11-ELEJ

● first choice
○ alternate choice


		KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
P				○	●		●	●		○
M				●	●		○	●	○	●
K			●	○		●	○			
N		●								
S				●	●			○	●	●
H										

LNGU11-ELEJ • For Aluminium and Other Non-Ferrous Alloys

catalogue number	LI	S	W	BS	Rε	hm	cutting edges	KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
LNGU110404ERLEJ	12,16	4,83	6,60	1,40	0,4	0,04	4	●	–	–	–	–	–	–	–	–
LNGU110408ERLEJ	12,16	4,83	6,60	1,00	0,8	0,04	4	●	–	–	–	–	–	–	–	–

- -EGE is the first choice for stainless steel and high-temp alloys.
- Use -EGE geometry for the highest finishing requirements, in light machining, for all materials.


LNGU11-EGE



LNGU11-EGE

LNGU11-EGE • Precision Ground • For Stainless Steel and High-Temp Alloys


catalogue number	LI	S	W	BS	Rε	hm	cutting edges	KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
LNGU110404ERGE	12,16	4,83	6,60	1,40	0,4	0,08	4	–	–	●	●	–	–	●	–	–
LNGU110408ERGE	12,16	4,83	6,60	1,00	0,8	0,08	4	–	–	●	●	–	–	●	●	●
LNGU110412ERGE	12,17	4,83	6,60	0,60	1,2	0,08	4	–	–	●	–	–	–	●	–	●

- -SGE is the universal geometry for Mill 4-11. First choice when machining steel, as well as stainless steel, and high-temp alloys in heavy applications.
- Precision ground insert results in a great versatility for both roughing and finishing operations.

● first choice
○ alternate choice

P			○	●		●	●		○
M			●	●		○	●	○	●
K		●	○		●	○			
N	●								
S			●	●			○	●	●
H									


LNGU11-SGE




LNGU11-SGE

LNGU11-SGE • Precision Ground • Universal Geometry • General Purpose for Roughing and Finishing Operations

catalogue number	LI	S	W	BS	Rε	hm	cutting edges	KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
LNGU110404SRGE	12,16	4,83	6,60	1,40	0,4	0,10	4	–	–	●	–	–	–	●	–	●
LNGU110408SRGE	12,16	4,83	6,60	1,00	0,8	0,10	4	–	–	●	●	●	●	●	–	●

- -SGE is the universal geometry for Mill 4-11. First choice when machining steel, as well as stainless steel and high-temp alloys in heavy applications.
- Precision-pressed insert is a perfect choice for roughing operations with a better cost per edge and great surface quality.


LNPU11-SGE




LNPU11-SGE

LNPU11-SGE • Precision Pressed • General Purpose for Roughing and Semi-Finishing Operations

catalogue number	LI	S	W	BS	Rε	hm	cutting edges	KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
LNPU110408SRGE	12,10	4,83	6,60	0,90	0,8	0,10	4	–	●	●	●	●	●	●	–	–
LNPU110412SRGE	12,10	4,83	6,60	0,50	1,2	0,10	4	–	●	●	●	●	●	●	–	–
LNPU110416SRGE	12,10	4,83	6,60	0,02	1,6	0,10	4	–	●	●	●	–	●	●	–	–

- -SGEM geometry is the first choice for cast iron machining in medium and heavy applications.
- -M stands for margins, which are used to reinforce the geometry.


LNGU11-SGEM



LNGU11-SGEM

LNGU11-SGEM • Precision Ground • For Cast Iron and Heavy Applications

catalogue number	LI	S	W	BS	Rε	hm	cutting edges	KC422M	KC520M	KC522M	KC725M	KCK15	KCPK30	KCPM40	KCSM30	KCSM40
LNGU110408SRGEM	12,16	4,83	6,60	0,90	0,8	0,10	4	–	●	●	–	●	●	●	–	–
LNGU110412SRGEM	12,16	4,83	6,60	0,60	1,2	0,10	4	–	●	–	–	●	●	●	–	–
LNGU110416SRGEM	12,16	4,83	6,60	0,10	1,6	0,10	4	–	●	–	–	●	●	●	–	–

Recommended Starting Feeds [mm]

Light Machining	General Purpose	Heavy Machining

Insert Geometry	Recommended Starting Feed per Tooth (Fz) in Relation to % of Radial Engagement (ae)															Insert Geometry
	5%			10%			20%			30%			40–100%			
.E..LEJ	0,13	**0,35**	0,58	0,09	**0,25**	0,42	0,07	**0,19**	0,31	0,06	**0,17**	0,27	0,06	**0,15**	0,25	.E..LEJ
.E..GE	0,23	**0,43**	0,59	0,17	**0,31**	0,43	0,13	**0,23**	0,32	0,11	**0,20**	0,28	0,10	**0,18**	0,25	.E..GE
.S..GE	0,23	**0,46**	0,65	0,17	**0,33**	0,47	0,13	**0,25**	0,35	0,11	**0,22**	0,31	0,10	**0,20**	0,28	.S..GE
.S..GEM	0,23	**0,46**	0,71	0,17	**0,33**	0,51	0,13	**0,25**	0,38	0,11	**0,22**	0,33	0,10	**0,20**	0,30	.S..GEM

NOTE: Use “Light Machining” values as starting feed rate.
Please see pages X22–X37 for recommended starting speeds.

Looking for a product that’s not shown in this catalogue?

Check the Kennametal website!

Online product catalogue available 24/7

Visit **kennametal.com/IndexableMilling** to browse our electronic catalogue any time you’re looking for the best Kennametal tooling solutions.

It’s fast, free, and always available. The online e-catalogue is updated weekly with products and solutions for milling, turning, holemaking, and tooling systems applications.



Mill 4-11 Starter Kits

Order one of our starting kits and test the performance of our new Mill 4™ platform. The kits are set up to serve the majority of shoulder milling applications, delivered with a cutter body as well as 20 inserts from a premium Kennametal grade.

Detailed order information can be found in the table below.

Order one Mill 4 kit and experience the next level of shoulder milling!



Mill 4-11 Starter Kits • Metric

order number	catalogue number	cutter diameter/ flutes	cutter type	material group	application range	content				
						cutter	quantity	insert	grade	quantity
6213970	M4-11KITD16Z2A16SGEKCPM40	16z2	Cylindrical	P	∇/∇∇	M4D016Z02A16LN11L090	1	LNPU110408SRGE	KCPM40	20
6214071	M4-11KITD20Z2B20SGEKCPM40	20z2	Weldon	P	∇/∇∇	M4D020Z02B20LN11	1	LNPU110408SRGE	KCPM40	20
6214072	M4-11KITD20Z3A20SGEKCPM40	20z3	Cylindrical	P	∇/∇∇	M4D020Z03A20LN11L090	1	LNPU110408SRGE	KCPM40	20
6214073	M4-11KITD25Z3B25SGEKCPM40	25z3	Weldon	P	∇/∇∇	M4D025Z03B25LN11	1	LNPU110408SRGE	KCPM40	20
6214074	M4-11KITD25Z4A25SGEKCPM40	25z4	Cylindrical	P	∇/∇∇	M4D025Z04A25LN11L100	1	LNPU110408SRGE	KCPM40	20
6214075	M4-11KITD32Z4B32SGEKCPM40	32z4	Weldon	P	∇/∇∇	M4D032Z04B32LN11	1	LNPU110408SRGE	KCPM40	20
6214076	M4-11KITD32Z5A32SGEKCPM40	32z5	Cylindrical	P	∇/∇∇	M4D032Z05A32LN11L110	1	LNPU110408SRGE	KCPM40	20
6214077	M4-11KITD40Z4S16SGEKCPM40	40z4	Shell Mill	P	∇/∇∇	M4D040Z04S16LN11	1	LNPU110408SRGE	KCPM40	20
6214078	M4-11KITD40Z6S16SGEKCPM40	40z6	Shell Mill	P	∇/∇∇	M4D040Z06S16LN11	1	LNPU110408SRGE	KCPM40	20
6214079	M4-11KITD50Z5S22SGEKCPM40	50z5	Shell Mill	P	∇/∇∇	M4D050Z05S22LN11	1	LNPU110408SRGE	KCPM40	20
6214080	M4-11KITD50Z7S22SGEKCPM40	50z7	Shell Mill	P	∇/∇∇	M4D050Z07S22LN11	1	LNPU110408SRGE	KCPM40	20
6214081	M4-11KITD63Z9S22SGEKCPM40	63z9	Shell Mill	P	∇/∇∇	M4D063Z09S22LN11	1	LNPU110408SRGE	KCPM40	20
6214082	M4-11KITD16Z2A16EGEKC725M	16z2	Cylindrical	M+S	∇∇/∇∇∇	M4D016Z02A16LN11L090	1	LNGU110408ERGE	KC725M	20
6214083	M4-11KITD20Z2B20EGEKC725M	20z2	Weldon	M+S	∇∇/∇∇∇	M4D020Z02B20LN11	1	LNGU110408ERGE	KC725M	20
6214084	M4-11KITD20Z3A20EGEKC725M	20z3	Cylindrical	M+S	∇∇/∇∇∇	M4D020Z03A20LN11L090	1	LNGU110408ERGE	KC725M	20
6214085	M4-11KITD25Z3B20EGEKC725M	25z3	Weldon	M+S	∇∇/∇∇∇	M4D025Z03B25LN11	1	LNGU110408ERGE	KC725M	20
6214086	M4-11KITD25Z4A25EGEKC725M	25z4	Cylindrical	M+S	∇∇/∇∇∇	M4D025Z04A25LN11L100	1	LNGU110408ERGE	KC725M	20
6214087	M4-11KITD32Z4B32EGEKC725M	32z4	Weldon	M+S	∇∇/∇∇∇	M4D032Z04B32LN11	1	LNGU110408ERGE	KC725M	20
6214088	M4-11KITD32Z5A32EGEKC725M	32z5	Cylindrical	M+S	∇∇/∇∇∇	M4D032Z05A32LN11L110	1	LNGU110408ERGE	KC725M	20
6214089	M4-11KITD40Z4S16EGEKC725M	40z4	Shell Mill	M+S	∇∇/∇∇∇	M4D040Z04S16LN11	1	LNGU110408ERGE	KC725M	20
6214090	M4-11KITD40Z6S16EGEKC725M	40z6	Shell Mill	M+S	∇∇/∇∇∇	M4D040Z06S16LN11	1	LNGU110408ERGE	KC725M	20
6214091	M4-11KITD50Z5S22EGEKC725M	50z5	Shell Mill	M+S	∇∇/∇∇∇	M4D050Z05S22LN11	1	LNGU110408ERGE	KC725M	20
6214092	M4-11KITD50Z7S22EGEKC725M	50z7	Shell Mill	M+S	∇∇/∇∇∇	M4D050Z07S22LN11	1	LNGU110408ERGE	KC725M	20
6214093	M4-11KITD63Z9S22EGEKC725M	63z9	Shell Mill	M+S	∇∇/∇∇∇	M4D063Z09S22LN11	1	LNGU110408ERGE	KC725M	20

∇ Heavy/Roughing
∇∇ Medium
∇∇∇ Light machining/Finishing