

Series 220MT, 230MT



TOLERANCES

$d1$	$+0.000" - .002" (+.000 - .050\text{mm})$
$d2$	$h6$

Standard Length - Square End

TiN Coating

Solid submicron grain carbide end mill - center cutting


Improved lubricity

Extremely versatile

Bright Finish - page 228

TiCN Coating - page 231

TiALN Coating - page 232

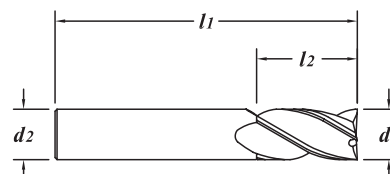

(220MT) 2 Flute EDP#	(230MT) 4 Flute EDP#	$d1$ † Diameter			$d2$ Shank Diameter	$l1$ Overall Length	$l2$ Flute Length
		Decimal		Metric			
11073	13073	.1250	1/8"	3.175	1/8"	1-1/2"	1/2"
11113	13113	.1875	3/16"	4.763	3/16"	2"	5/8"
11153	13153	.2500	1/4"	6.350	1/4"	2-1/2"	3/4"
11193	13193	.3125	5/16"	7.938	5/16"	2-1/2"	7/8"
11233	13233	.3750	3/8"	9.525	3/8"	2-1/2"	7/8"
11273	13273	.4375	7/16"	11.113	7/16"	2-3/4"	1"
11313	13313	.5000	1/2"	12.700	1/2"	3"	1"
11333	13333	.6250	5/8"	15.875	5/8"	3-1/2"	1-1/4"
11353	13353	.7500	3/4"	19.050	3/4"	4"	1-1/2"
-	13373	1.000	1"	25.400	1"	4"	1-1/2"

